



PowerTrap®

MODEL GP10F*

MECHANICAL PUMP WITH RETROFITTABLE MECHANISM FOR CONDENSATE REMOVAL AND RECOVERY

Features

Pump for a wide range of applications. Ideal for condensate removal from vented receivers and sump drainage.

1. Will handle high temperature condensate without any cavitation.
2. No electric power or additional level controls required, hence **INTRINSICALLY SAFE**.
3. Pump will operate with a low filling head.
4. Durable nickel-based alloy compression coil spring.
5. All internal parts are suspended from the trap cover and can be removed upward in one piece.
6. High quality stainless steel internals and hardened working surfaces ensure reliability.
7. Optional built-in steam trap available for drainage of steam supply line.
8. Mechanism retrofits some other makers' pumps.**
9. Cycle Counter installable as option.



* Only available in some countries ** Contact TLV for details

Specifications

Model		GP10F
Connection	Pumped Medium Inlet & Outlet	Screwed Rc (PT)*
	Motive Medium & Pump Exhaust	Screwed Rc (PT)*
Size (mm)	Pumped Medium Inlet x Outlet	80 x 50
	Motive Medium Inlet	20
	Pump Exhaust Outlet	25
Maximum Operating Pressure (MPaG)	PMO	1.05
Maximum Operating Temperature (°C)	TMO	220
Motive Medium Pressure Range (MPa)		0.03 – 1.05
Volume of Each Discharge Cycle (ℓ)		approximately 30
Motive Medium**		Saturated Steam, Compressed Air, Nitrogen
Pumped Medium***		Steam Condensate, Water

* Other standards available ** Do not use with toxic, flammable or otherwise hazardous fluids. 1 MPa = 10.197 kg/cm²

*** Do not use for fluids with specific gravities under 0.85 or over 1, or for toxic, flammable or otherwise hazardous fluids.


PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS): Maximum Allowable Pressure (MPaG) PMA : 1.05
Maximum Allowable Temperature (°C) TMA : 220





To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

No.	Description	Material	JIS	ASTM/AISI*	
①	Body	Carbon Steel**	—	(SA414)	
②	Cover	Cast Steel**	—	A216 Gr.WCB	
③	Cover Gasket	Graphite Compound	—	—	
④	Float	Stainless Steel	SUS316L	AISI316L	
⑤	Snap-action Unit	Stainless Steel	—	—	
⑥	Motive Medium Intake Valve Unit	Intake Valve	Stainless Steel	SUS440C	AISI440C
	Valve Seat	Stainless Steel	SUS440C	AISI440C	
⑦	Exhaust Valve Unit	Exhaust Valve	Stainless Steel	SUS440C	AISI440C
	Valve Seat	Stainless Steel	SUS420F	AISI420F	
⑧	TLV CK3MG Check Valve***	Stainless Steel	—	—	

* Equivalent ** Option: Stainless steel *** Not shown

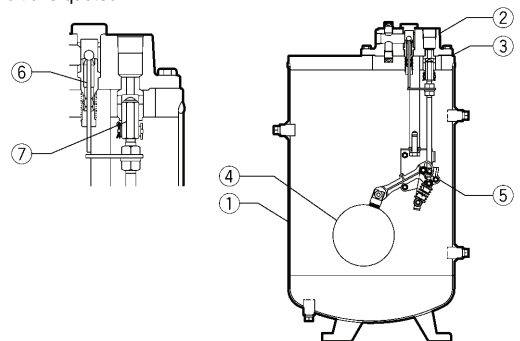

Dimensions

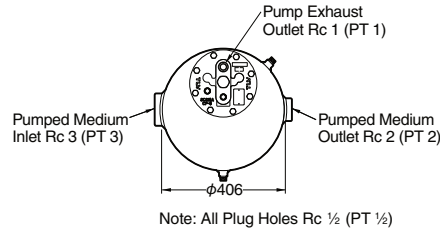


Units: mm

Weight: 70 kg


Discharge Capacity

A – 3" CK3MG check valve at inlet, 2" at outlet, 1070 mm filling head

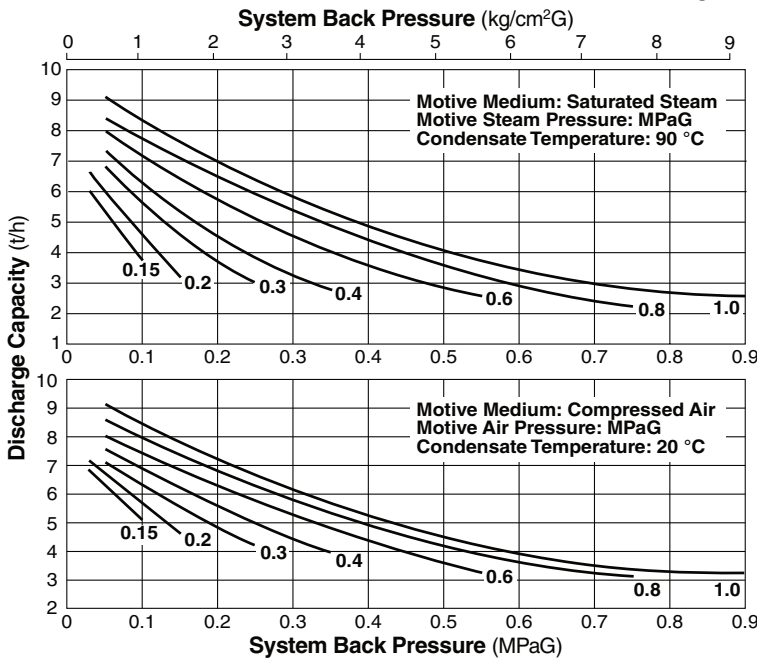


• Correction Factor

For GP10F with 3" inlet check valve CK3MG, installed with filling head other than 1070 mm (minimum filling head: 840 mm)

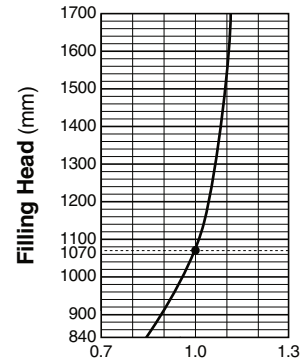


• Illustration of Filling Head and Pressures

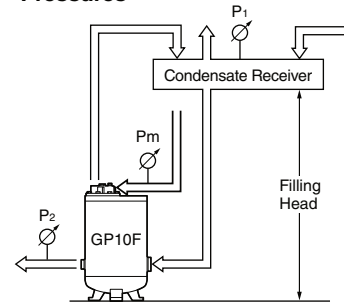

• The Discharge Capacity is determined by the motive medium, motive medium pressure (Pm) and back pressure (P2).


Make sure that: Discharge Capacity × correction factor > required flow rate.

B – 2" CK3MG check valve at inlet/outlet, 1070 mm filling head

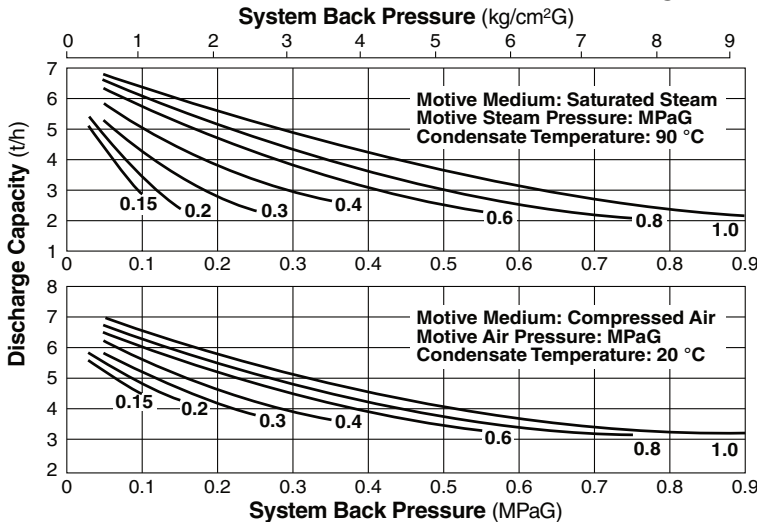

• Correction Factor

For GP10F with 2" inlet check valve CK3MG, installed with filling head other than 1070 mm (minimum filling head: 840 mm)

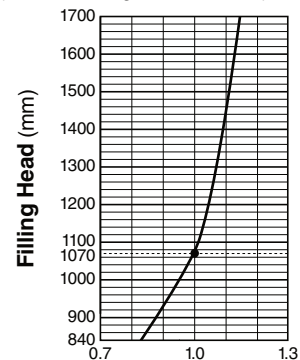

NOTE:

- A check valve must be installed at both the pumped medium inlet and outlet. To achieve the above capacities with the standard GP10F configuration, TLV CK3MG check valves must be used at the pumped medium inlet and outlet.
- Motive steam pressure minus back pressure must be greater than 0.05 MPa.
- In closed system applications, the motive medium must be compatible with the liquid being pumped. If a non-condensable gas such as air or nitrogen is used as the motive medium, consult TLV for assistance.
- A strainer must be installed at the motive medium and pumped medium inlets.

Size of Receiver/Reservoir

The receiver/reservoir must have a capacity sufficient to store the condensate produced during the **PowerTrap** operation and discharge. A receiver will generally be larger than a reservoir because it must handle the condensate both as a liquid and as flash steam, and separate one from the other so that only condensate is sent to the **PowerTrap**.

① Size of Receiver (flash steam is involved) (Length: 1 m)

Flash steam up to kg/h	Receiver diameter mm (in)	Vent pipe diameter mm (in)
25	80 (3)	25 (1)
50	100 (4)	50 (2)
75	125 (5)	50 (2)
100	150 (6)	80 (3)
150	200 (8)	80 (3)
200	200 (8)	100 (4)
300	250 (10)	125 (5)
400	300 (12)	125 (5)
500	350 (14)	150 (6)
700	400 (16)	200 (8)
800	450 (18)	200 (8)
1000	500 (20)	200 (8)
1100	500 (20)	250 (10)
1400	550 (22)	250 (10)
1500	600 (24)	250 (10)


② Size of Reservoir (flash steam is not involved)

Amount of condensate kg/h	Reservoir diameter (mm) and length (m)						
	40	50	80	100	150	200	250
300 or less	1.2 m	0.7					
400	1.5	1.0					
500	2.0	1.2	0.5				
600		1.5	0.6				
800		2.0	0.8	0.5			
1000			1.0	0.7			
1500			1.5	1.0			
2000			2.0	1.3	0.6		
3000				2.0	0.9	0.5	
4000					1.2	0.7	
5000					1.4	0.8	0.5
6000					1.7	1.0	0.6
7000					2.0	1.2	0.7
8000						1.3	0.8
9000						1.5	0.9
10000						1.7	1.0

③ If flash steam is condensed before it enters the receiver/reservoir, compare tables ① and ② and choose the larger of the two sizes.

Reservoir length can be reduced by 50% when the motive pressure (P_m) divided by the back pressure (P₂) equals 2 or greater (when P_m ÷ P₂ ≥ 2).


Steam or Air Consumption (Motive Medium)

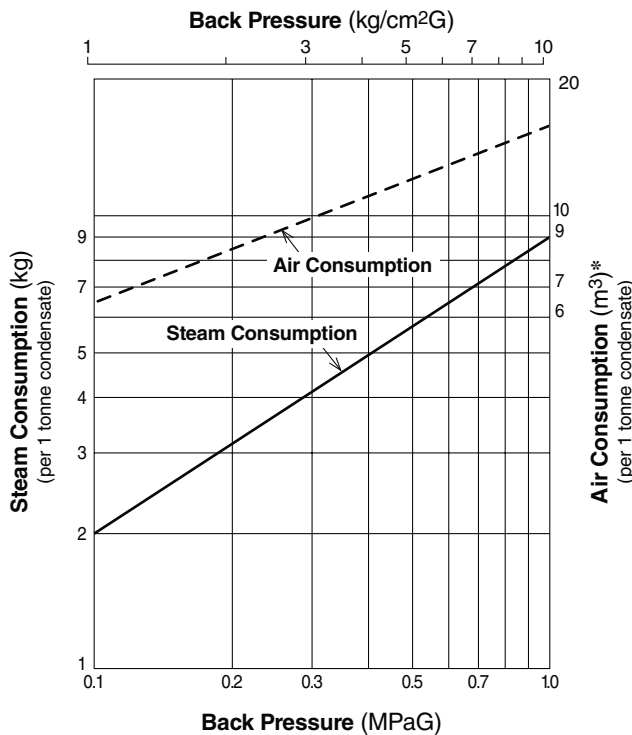


* Equivalent consumption of air at 20 °C under atmospheric pressure

Cycle Counter (option)


Two types of counter can be installed on the GP10F to monitor the number of pumping cycles and help to determine the timing of maintenance, or estimate the volume of pumped condensate.



- C1CF - (Counter Unit Type) : Self-contained standalone unit. Includes an LCD counter display and an operation indicator LED.



- C1SF - (Terminal Box Type) : Designed for use with remote monitoring equipment and systems.



Intrinsically safe models are also available. See the Cycle Counter SDS for further details.

Memo:

Manufacturer

ISO 9001/ISO 14001

TLV® CO., LTD.
Kakogawa, Japan

is approved by LRQA Ltd. to ISO 9001/14001

