


# TLV®

## STEAM PRESSURE REDUCING VALVES

### COSR-3 COSR-16 COSR-21




SAS: Shock Absorbing Spherical Piston

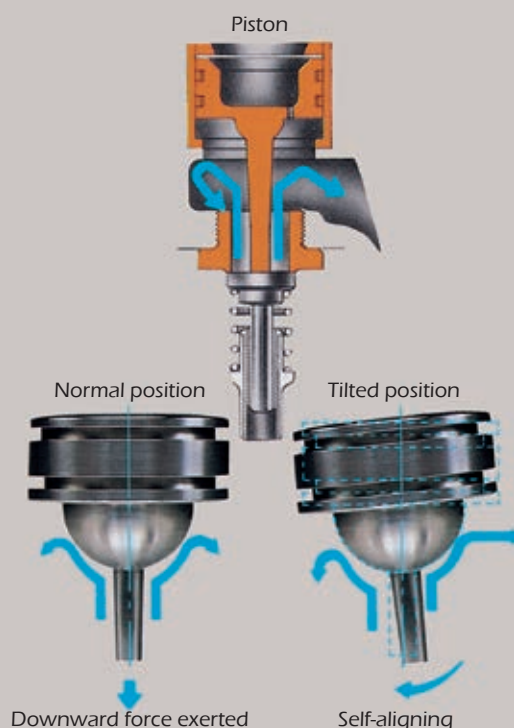

### Features

- The shock absorbing spherical (**SAS**) piston maintains the secondary pressure with high accuracy.
- Stable secondary pressure can be maintained, even with fluctuations in primary pressure or flow rate.
- Self-aligning feature allows the piston to move smoothly, resulting in accurate responsive control.
- Internal primary and secondary pressure sensing channels make external sensing line attachments to the valve unnecessary for most applications.
- All key internal parts are made of stainless steel.
- Motorized type (**M-COSR**) and computerized (**MC-COSR**) valves are also available.

# How It Works

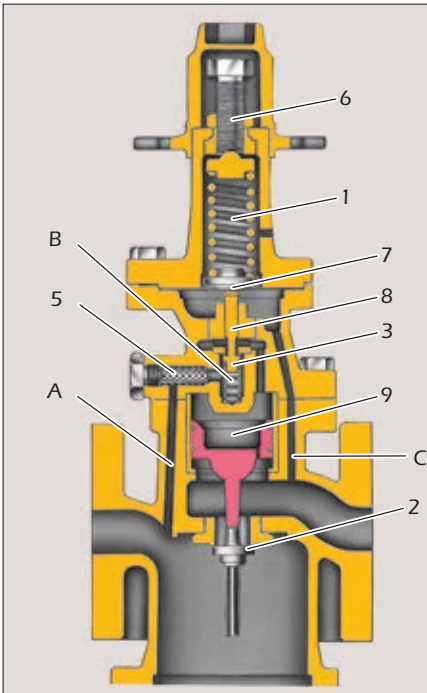

Until upper coil spring (1) is compressed, main valve (2) and pilot valve (3) are closed. Steam enters through passage (A), passes through screen (5) and enters pilot chamber (B).

When secondary pressure is set by tightening adjusting screw (6), upper coil spring (1) is compressed and diaphragm (7) flexes, forcing pilot guide (8) to open pilot valve (3). Steam enters chamber above piston (9), forcing it down. Main valve (2) opens the orifice, providing steam to the secondary side.

Some steam, entering the outlet side, flows through outlet pressure passage (C) into a chamber below the diaphragm (7), and lifts it. The position of pilot valve (3) is then determined by the balance of the upward force on the diaphragm with the downward force of upper coil spring (1). Thus the preset secondary steam pressure itself adjusts the force applied to the piston (9) and the opening of the main valve (2). Secondary pressure remains stable at all times.

## Standard Specifications

Model	COSR-3				COSR-16				COSR-21			
	Cast Iron		Ductile Cast Iron		Cast Iron		Ductile Cast Iron		Ductile Cast Iron			
Body Material*	Screw		Flanged		Screw		Flanged		Flanged			
Connection	ASME		DIN		ASME		DIN		ASME		DIN	
Size (mm)	20, 25		20, 25, 32, 40, 50		15, 20, 25, 40, 50		15, 20, 25, 32, 40, 50, 65, 80, 100, 125**, 150		15, 20, 25, 32, 40, 50, 65, 80, 100			
Max. Operating Pressure (MPaG) PMO	0.3				1.6				2.1			
Max. Operating Temperature (°C) TMO	220				220				220			
Primary Pressure Range (MPaG)	0.1 – 0.3				0.2 – 1.6				1.35 – 2.1			
Adjustable Pressure Range (all conditions must be met)	0.01 – 0.05 MPaG				Within 10 - 84% of primary pressure but with minimum pressure of 0.03 MPaG				From 0.55 MPaG to 84% of primary pressure			
	-				Differential pressure between 0.07 – 0.85 MPa				Maximum differential pressure 0.85 MPa			
Minimum Adjustable Flow Rate	5% of rated flow rate***				5% of rated flow rate*** (65 mm and larger: 10% of rated flow rate***)							

\* COSR-3 flanged: cast stainless steel sizes 20, 25, 40, 50 available on request  
 COSR-16 flanged: cast stainless steel sizes 15, 20, 25, 40, 50 (ASME and DIN) and cast steel sizes 65 & 80 (DIN) available on request  
 \*\* Not available with DIN \*\*\* See SDS (Specification Data Sheet) for rated flow rate

PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS): Maximum Allowable Pressure (MPaG): PMA: 1.6 (Cast Iron), 2.1 (Ductile Cast Iron)  
 Maximum Allowable Temperature (°C) TMA: 220

**CAUTION** To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

## Dimensions

Size (DN)	COSR-3/COSR-16 Screw, Flanged (mm)						COSR-21 Flanged (mm)											
	Screw Rc(PT)	L				H	H <sub>i</sub>	Weight** (kg)	Size (DN)	L			H	H <sub>i</sub>	H	H <sub>i</sub>	Weight* (kg)	
		125FF	150RF	250RF	300RF					DIN2501 PN25/40	150RF	300RF						PN25/40
(15)	175	-	170	-	170	130	357	285	9.5[8.8]	(15)	161	167	130	405	305	377	305	11[9]
(20)	-	182	-	182	150	150		11[9.5]	(20)	172	178	150	405	305	377	305	13[9.7]	
25	190	176	188	180	192	160	385	282	13[11]	25	181	187	160	422	302	302	302	15[11]
32	220	206	220	220	220	180		295*	17[16]	32	212	219	180	457	322	405	322	19[17]
40	-	209	220	222	224	200	412	302	19[17]	40	215	222	200	490	335	432	335	21[17]
50	260	247	255	260	261	230		315	26[24]	50	254	260	230	490	335	432	335	36[24]
65	-	362	372	377	378	290	554	411	55[50]	65	371	377	290	655	430	576	432	59[51]
80	-	365	374	383	384	310		59[52]	80	374	384	310	655	430	576	432	62[52]	
100	-	434	434	450	450	350	633	448	95[80]	100	434	450	350	768	468	655	470	95[81]
125	-	-	456	456	-	-		119[-]	119[-]	125	-	-	-	-	-	-	-	-
150	-	600	600	622	622	480	810	530	205[176]	150	-	-	-	-	-	-	-	-

Sizes 15 – 25 mm shown. Configuration of larger sizes differs slightly.

( ) No ASME standard exists for cast iron; machined to fit steel flanges  
 Class 125 FF can connect to 150 RF, 250 RF can connect to 300 RF  
 Other standards available, but length and weight may vary  
 \* Screwed \*\* Weight is for Class 300 RF, [ ] DIN PN 25/40

( ) No ASME standard exists for ductile cast iron; machined to fit steel flanges  
 Other standards available, but length and weight may vary  
 \* Weight is for Class 300 RF, [ ] DIN PN 25/40

## TLV INTERNATIONAL, INC.

881 Nagasuna, Noguchi, Kakogawa, Hyogo 675-8511, JAPAN  
 Tel: [81]-(0)79-427-1818 Fax: [81]-(0)79-425-1167  
 E-mail: tlv-japan@tlv.co.jp <https://www.tlv.com>

Manufacturer  
**TLV CO., LTD.**  
 Kakogawa, Japan  
 is approved by LRQA Ltd. to ISO 9001/14001

