



CYCLE COUNTER


MODEL C1CM/C1CF C1SM/C1SF STAINLESS STEEL

COUNTER FOR MONITORING THE NUMBER OF PUMP CYCLES OF POWERTRAPS

Features

Enables monitoring of the number of pumping cycles of GP series PowerTraps to help determine the timing of maintenance, or estimate the volume of pumped condensate.

- Two different types are available to support various system requirements.
- The Counter Unit types (C1CM(-EX) / C1CF(-EX)) include a built-in LCD display and LED that flashes with each operation cycle to allow easy direct observation.
- The Terminal Box Types (C1SM(-EX) / C1SF(-EX)) combine with an external display to enable remote observation or integration into a broader monitoring system.
- Can be equipped on currently installed GP series PowerTraps.
- OK for installation outdoors.

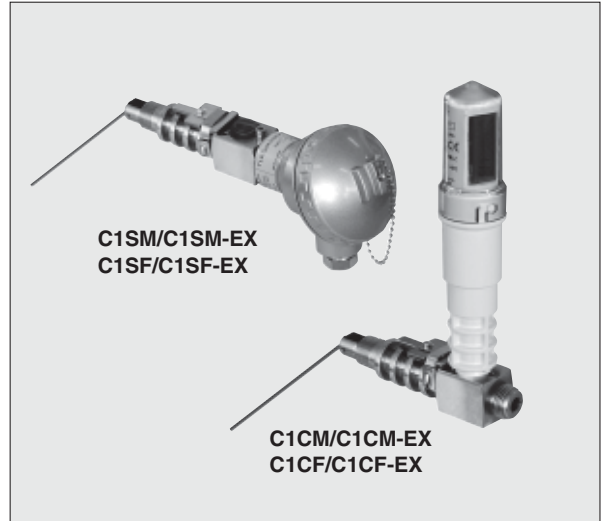

Specifications

| Model | C1CM | C1CM-EX | C1CF | C1CF-EX | C1SM | C1SM-EX | C1SF | C1SF-EX | | |
|--|---|----------------------------------|--------------|----------------------------------|---|----------------------------------|--------------|----------------------------------|--------------|--------------|
| Type | Counter Unit | | | | Terminal Box | | | | | |
| Installable PowerTrap Models | GP10, GP10M, GP10L, GP14, GP14M, GP14L | | GP10F, GP21F | | GP10, GP10M, GP10L, GP14, GP14M, GP14L | | GP10F, GP21F | | | |
| Description | Standard | Intrinsically Safe ¹⁾ | Standard | Intrinsically Safe ¹⁾ | Standard | Intrinsically Safe ¹⁾ | Standard | Intrinsically Safe ¹⁾ | | |
| Connection | Screwed | | | | | | | | | |
| Size | 1/2" | | | | | | | | | |
| Max Operating Pressure (barg) PMO ²⁾ | 21 | | | | | | | | | |
| Max Operating Temperature (°C) TMO ²⁾ | 220 | | | | | | | | | |
| Ambient Pressure ²⁾ | Atmospheric | | | | | | | | | |
| Ambient Temperature ²⁾ | -10 to 55 °C | | | | -45 to 90 °C | | -20 to 80 °C | | -45 to 90 °C | -20 to 80 °C |
| Applicable Fluids ³⁾ | Steam, Air, Nitrogen, Steam Condensate, Water | | | | | | | | | |
| Power Supply | Special Built-in Lithium Battery (3.6V) Battery Life: approx. 10 years ⁴⁾ | | | | Max. Input Power (Pi): 1W Max. Incoming Voltage (Ui): 28V Max. Incoming Current (Ii): 120 mA Max. Internal Capacitance (Ci): 3nF Max. Internal Inductance (Li): 0 Note: (Ui)V x (Ii)A ≤ 1 W (Pi) | | | | | |
| Display | 8 digit LCD ⁵⁾ | | | | — | | | | | |
| Terminal | — | | | | Wiring Inlet: G 1/2 | | | | | |
| Protection Class | — | | | | IP65 | | | | | |
| Accessories | Counter Resetter | | | | — | | | | | |

¹⁾ ATEX/IECEx or cULus. See reverse side for details of applicable standards. 1 bar = 0.1 MPa

²⁾ PMO and TMO apply to the inserted portion only. Ambient Pressure/Temperature apply to the external portion.

³⁾ Do not use for toxic, flammable or otherwise hazardous fluids. ⁴⁾ Battery cannot be replaced. ⁵⁾ Counter display can be reset to zero by using the included resetter.


DESIGN CONDITIONS FOR INSERTED PORTION (**NOT** OPERATING CONDITIONS): Maximum Allowable Pressure (barg) PMA: 21
Maximum Allowable Temperature (°C) TMA: 260



To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

| No. | Description | Material | DIN* | ASTM/AISI* |
|-----|----------------------|------------------------|--------|------------|
| ① | Sensor Body | Stainless Steel SUS303 | 1.4305 | AISI303 |
| ② | Sensor Arm | Stainless Steel SUS304 | 1.4301 | AISI304 |
| ③ | Counter Body | Polyetherimide PEI | PEI | — |
| ④ | Cap | Polysulfone PSF | PSF | — |
| ⑤ | Display (LCD) | — | — | — |
| ⑥ | LED | — | — | — |
| ⑦ | Switch Unit | Polyetherimide PEI | PEI | — |
| ⑧ | Terminal Box | Die Cast Aluminium ADC | ADC | — |
| ⑨ | Hex Socket Head Bolt | Stainless Steel SUS304 | 1.4301 | AISI304 |
| ⑩ | Nameplate | Polyester | — | — |
| ⑪ | Magnet Booster Kit | Stainless Steel SUS304 | 1.4301 | AISI304 |


* Equivalent materials

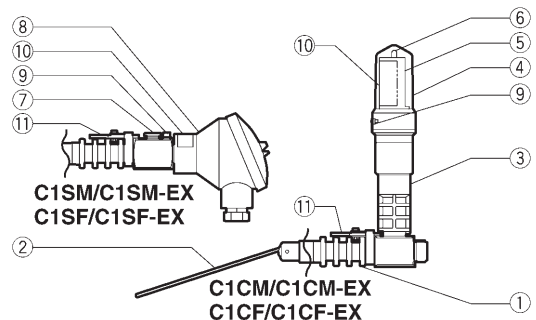

Copyright © TLV

Dimensions


● **C1CM(-EX) / C1CF(-EX)** Screwed

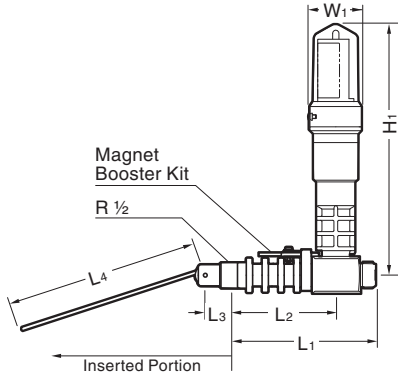


C1CM(-EX) / C1CF(-EX) Screwed* (mm)

| Size | L1 | L2 | L3 | L4 | H1 | φ W1 | Weight (g) |
|------|-----|----|----|-----|-----|------|------------|
| 1/2" | 114 | 82 | 22 | 150 | 200 | 41 | 660 |

* R, other standards available (R is equivalent to BSPT)
C1CM/C1CM-EX shown. C1CF/C1CF-EX differs only by the travel arc of the sensor arm.

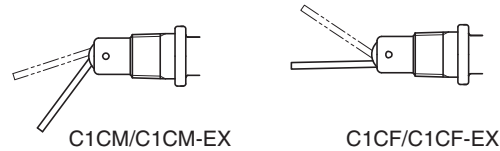


● **C1SM(-EX) / C1SF(-EX)** Screwed

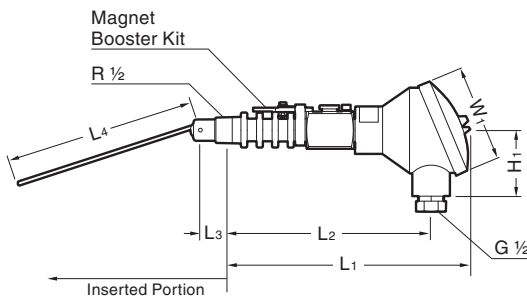

C1SM(-EX) / C1SF(-EX) Screwed* (mm)


| Size | L1 | L2 | L3 | L4 | H1 | φ W1 | Weight (g) |
|------|-----|-----|----|-----|----|------|------------|
| 1/2" | 195 | 164 | 22 | 150 | 49 | 80 | 700 |

* R, other standards available (R is equivalent to BSPT)
C1SM/C1SM-EX shown. C1SF/C1SF-EX differs only by the travel arc of the sensor arm.

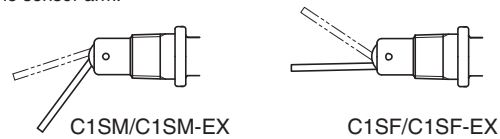


Installation


● **C1CM/C1CM-EX**



● **C1SM/C1SM-EX**



● **C1CF/C1CF-EX (C1SF/C1SF-EX)***

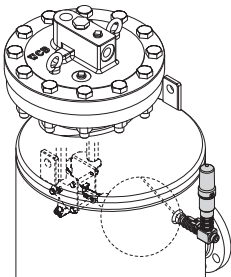


* Not shown

NOTE: Cycle Counter cannot be installed on GP series PowerTraps insulated with an insulation thickness exceeding 40 mm.

Intrinsic Safety Standards

| Model | Standard | Class |
|--------------------|----------|---|
| C1CM-EX C1CF-EX | ATEX | ⊕ II2G Ex ib IIB T3/T2 DEKRA 13 ATEX 0038 |
| | IECEX | Ex ib IIB T3/T2 Gb IECEX DEK 13.0003 |
| | cULus | Class I, Zone 1, AEx ib IIB T3/T2 Class I, Zone 1, Ex ib IIB T3/T2 File No. E360402 |
| C1SM-EX C1SF-EX | ATEX | ⊕ IIG Ex ib IIC T3/T2 DEKRA 13 ATEX 0039 |
| | IECEX | Ex ib IIC T3/T2 Gb IECEX DEK 13.0004 |
| | cULus | Class I, Zone 1, AEx ib IIC T3/T2 Class I, Zone 1, Ex ib IIC T3/T2 File No. E360402 |

Safety Barrier: The intrinsic safety specifications of the terminal box type C1SM-EX/C1SF-EX require a safety barrier to be used.

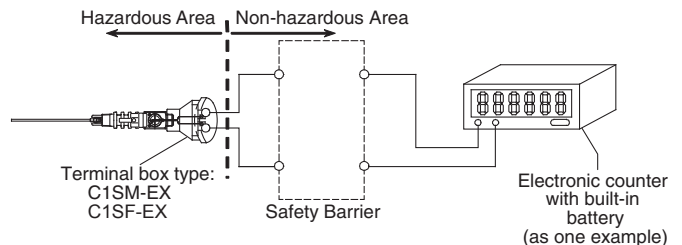

Manufacturer

ISO 9001/ISO 14001

TLV CO., LTD.
Kakogawa, Japan

is approved by LRQA Ltd. to ISO 9001/14001

