



CHECK VALVE

MODEL CK3M/CK3T/CK3R BRASS, BRONZE, STAINLESS STEEL

DISC TYPE CHECK VALVE WITH SCREW CONNECTION

Features

Compact check valve for steam, air, water and other fluid services.

1. Fine-machined metal, fluorine resin or nitrile rubber valve seat provides tight closure.
2. Corrosion resistant body material and stainless steel internal parts ensure long service life.
3. Performance assured with installation in either horizontal or vertical pipelines.



Specifications

Model	CK3M			CK3T			CK3R		
Connection	Screwed								
Size	1/2"-1"	1/4"-2"	1/2"-2"	1/2"-1"	1/4"-2"	1/2"-2"	1/2"-1"	1/4"-2"	1/2"-2"
Body Material	Brass	Bronze	Stain. Steel	Brass	Bronze	Stain. Steel	Brass	Bronze	Stain. Steel
Sealing Surface*	Brass	Bronze	Stain. Steel	Fluorine Resin			Nitrile Rubber		
Maximum Operating Pressure (barg) PMO	10		21	10		16	10		16
Minimum Opening Differential Pressure** (bar)	0.002								
Minimum Required Differential Pressure for Tight Sealing (bar)	—						0.05		
Maximum Operating Temperature (°C) TMO	220			185			90		
Applicable Fluids***	Steam			Steam, Hot Water			Air, Water		

* Perfect sealing cannot be guaranteed for metal or fluorine resin sealing surfaces. 1 bar = 0.1 MPa

Degradation of, or debris on, rubber sealing surfaces may also prevent perfect sealing.


** When the valve has remained closed for a long period of time, the valve and the valve seat may stick, increasing the necessary minimum opening differential pressure.

*** Do not use for toxic, flammable or otherwise hazardous fluids.

PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS): Maximum Allowable Pressure (barg) PMA: 10 (Brass, Bronze), 21 (Stainless Steel)
Maximum Allowable Temperature (°C) TMA: 220

CAUTION To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

No.	Description	Material	DIN*	ASTM/AISI*	
①	Valve Body	1/2"-1"	Brass C3604	2.0401 B16C36000	
		1/4"-2"	Bronze CAC407	CC498K B584C92200	
		1/2"-2"	Cast Stainless Steel SCS13	1.4308 A351 Gr.CF8	
②	Inlet Union	1/2"-1"	Brass C3604	2.0401 B16C36000	
		1/4"-2"	Bronze CAC407	CC498K B584C92200	
		1/2"-2"	Cast Stainless Steel SCS13	1.4308 A351 Gr.CF8	
③ ^{MR}	Union Gasket	Fluorine Resin PTFE	PTFE	PTFE	
④ ^R	Valve Disc	1/2"-1"	Stainless Steel SUS304	1.4301 AISI304	
		1/4"-2"	Cast Stainless Steel SCS13	1.4308 A351 Gr.CF8	
⑤	Spring Holder	Stainless Steel SUS304	1.4301	AISI304	
⑥ ^R	Coil Spring	Stainless Steel SUS304	1.4301	AISI304	
⑦	Valve Seat	CK3M	1/2"-1"	Brass C3604	2.0401 B16C36000
			1/4"-2"	Bronze CAC407	CC498K B584C92200
			1/2"-2"	Cast Stainless Steel SCS13	1.4308 A351 Gr.CF8
		CK3T	Fluorine Resin PTFE	PTFE	PTFE
	CK3R	Caoutchouc nitrile NBR	NBR	D2000BF	

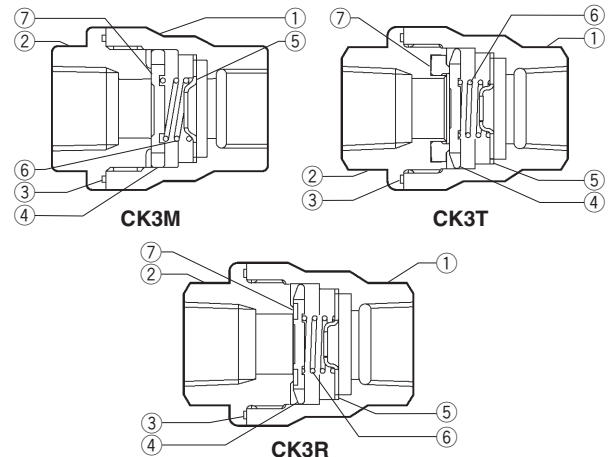


* Equivalent materials
Replacement kits available: (M) maintenance parts, (R) repair parts
When requesting replacement kits, please specify the Minimum Opening Differential Pressure.

Dimensions

● **CK3M/CK3T/CK3R** Screwed

Brass, Size 1/2"–1"

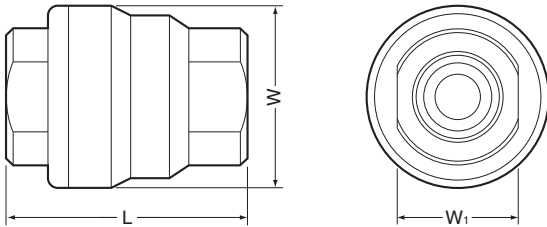


CK3M/CK3T/CK3R Screwed* (mm)


Size	L	φW	W ₁	Weight (kg)
1/2"	55	40	27	0.3
3/4"	60	50	32	0.5
1"	70	60	41	0.8
1 1/4"	80	75	50	1.3
1 1/2"	85	85	55	1.6
2"	100	95	70	2.2

* BSP DIN 2999, other standards available

Bronze, Size 1 1/4"–2"

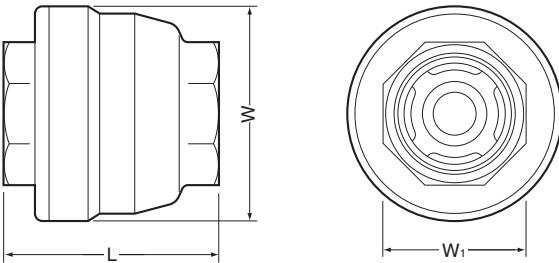

Stainless Steel, Size 1/2"–2"

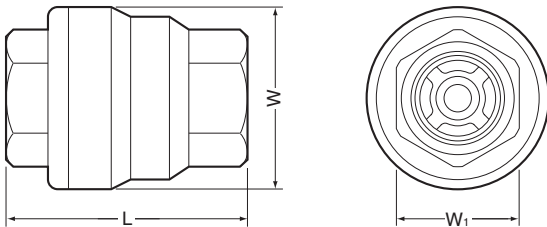

Cv Values

Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kvs (DIN)	3.2	5.7	8.6	13	18	25
Cv (UK)	3.1	5.5	8.3	13	17	24
Cv (US)	3.7	6.6	10	15	21	29

Manufacturer
TLV CO., LTD.
 Kakogawa, Japan
 is approved by LRQA Ltd. to ISO 9001/14001

