



# PowerTrap®

## MODEL GP10 CAST IRON CAST STEEL

### MECHANICAL PUMP FOR CONDENSATE REMOVAL AND RECOVERY

#### Features

Pump for a wide range of applications. Ideal for condensate removal from vented receivers and sump drainage.

1. Handles high-temperature condensate without cavitation.
2. No electric power or additional level controls required, hence INTRINSICALLY SAFE.
3. Pump will operate with a low filling head.
4. Durable nickel-based alloy compression coil spring.
5. Easy, inline access to internal parts simplifies cleaning and reduces maintenance costs.
6. High-quality stainless steel internals and hardened working surfaces ensure reliability.
7. Cycle Counter installable as option.

#### Pressure Equipment Directive (PED)

Classification according to PED 2014/68/EU, fluid group 2

Size	Category	CE marking
DN 50, DN 80	II	With CE marking and Declaration of Conformity



#### Specifications

Model		GP10		
Body Material		Cast Iron	Cast Steel	
Connection	Pumped Medium Inlet & Outlet	Screwed	Screwed	Flanged
	Motive Medium & Pump Exhaust	Screwed	Screwed	Flanged
Size (mm)	Pumped Medium: Inlet x Outlet	3" x 2"		DN 50 x 50, DN 80 x 50
	Motive Medium Inlet	1"		DN 25
	Pump Exhaust Outlet	1"		DN 25
Maximum Operating Pressure (barg)	PMO	10.5		
Maximum Operating Temperature (°C)	TMO	185		
Motive Medium Pressure Range (barg)		0.3 – 10.5		
Maximum Allowable Back Pressure		0.5 bar less than motive medium pressure used		
Volume of Each Discharge Cycle (ℓ)		approximately 30		
Motive Medium*		Saturated Steam, Compressed Air, Nitrogen		
Pumped Medium**		Steam Condensate, Water		
Option Specifications for Hazardous Locations		ATEX: ⓈII2G Ex h IIC T3 Gb		

\* Do not use with toxic, flammable or otherwise hazardous fluids.

1 bar = 0.1 MPa

\*\* Do not use for fluids with specific gravities under 0.85 or over 1, or with toxic, flammable or otherwise hazardous fluids.

PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS): Maximum Allowable Pressure (barg) PMA: 13 (Cast Iron), 16 (Cast Steel)  
Maximum Allowable Temperature (°C) TMA: 200 (Cast Iron) 220 (Cast Steel)




To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.


No.	Description	Material	DIN*	ASTM/AISI*	
①	Body	Cast Iron FC250	0.6025	A126 Cl.B	
		Cast Steel** A216 Gr.WCB	1.0619	—	
②	Cover	Cast Iron FC250	0.6025	A126 Cl.B	
		Cast Steel** A216 Gr.WCB	1.0619	—	
③	Cover Gasket	Graphite Compound	—	—	
④	Float	Stainless Steel SUS316L/303	1.4404/1.4305	AISI316L/303	
⑤	Lever Unit	Stainless Steel	—	—	
⑥	Snap-action Unit	Stainless Steel	—	—	
⑦	Motive Medium Intake Valve Unit	Intake Valve	Stainless Steel SUS303/440C	1.4305/1.4125	AISI303/440C
		Valve Seat	Cast Stainless Steel A351 Gr.CF8/ Stainless Steel SUS440C	1.4312/ 1.4125	—/ AISI440C
⑧	Exhaust Valve Unit	Exhaust Valve	Stainless Steel SUS303/440C	1.4305/1.4125	AISI303/440C
		Valve Seat	Stainless Steel SUS420F	1.4028	AISI420F
⑨	Check Valve***	CK3MG	Cast Stainless Steel A351 Gr.CF8	1.4312	—
		CKF3MG	Cast Stainless Steel A351 Gr.CF8	1.4312	—

\* Equivalent materials \*\* Option: Cast Stainless Steel

\*\*\* Not shown, model depends on GP10 connection; CK3MG for screwed, CKF3MG for flanged

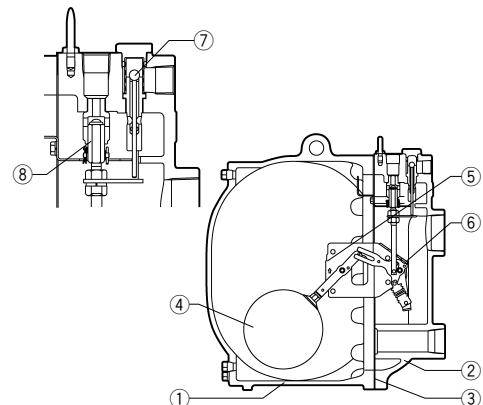


## Discharge Capacity

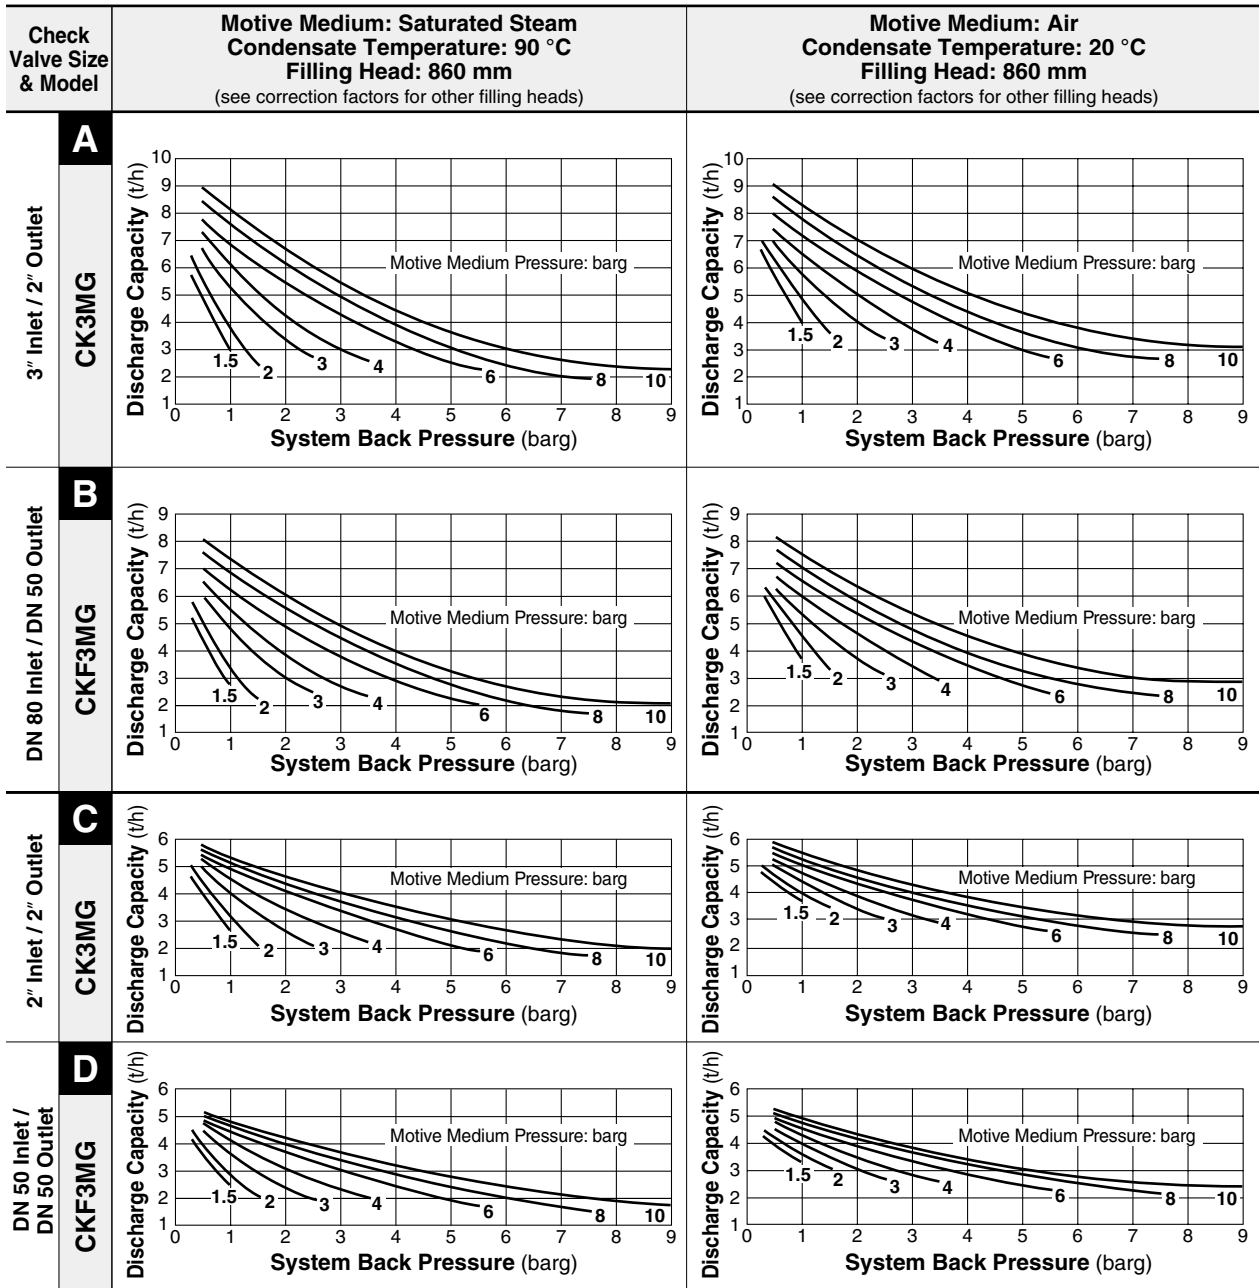

• **Correction Factors** (for filling heads other than 860 mm)


For Discharge Capacity Graphs **A & B**

(minimum filling head: 710mm)



For Discharge Capacity Graphs **C & D**


(minimum filling head: 710mm)



**NOTE:**

- A check valve must be installed at both the pumped medium inlet and outlet. To achieve the above capacities with the standard GP10 configuration, TLV CK3MG or CKF3MG check valves must be used.
- Motive medium pressure minus back pressure must be greater than 0.5 bar.
- In closed system applications, the motive medium must be compatible with the liquid being pumped. If a non-condensable gas such as air or nitrogen is used as the motive medium, consult TLV for assistance.
- A strainer must be installed at the motive medium and pumped medium inlets.


• **Illustration of Filling Head and Pressures**

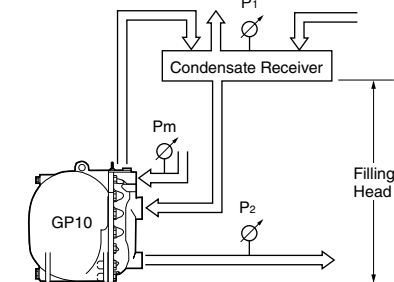

The discharge capacity is determined by the motive medium, motive medium pressure (Pm) and back pressure (P2).  
Make sure that:

$$\text{Discharge Capacity} \times \text{Correction Factor} > \text{Required Flow Rate}$$

## Dimensions

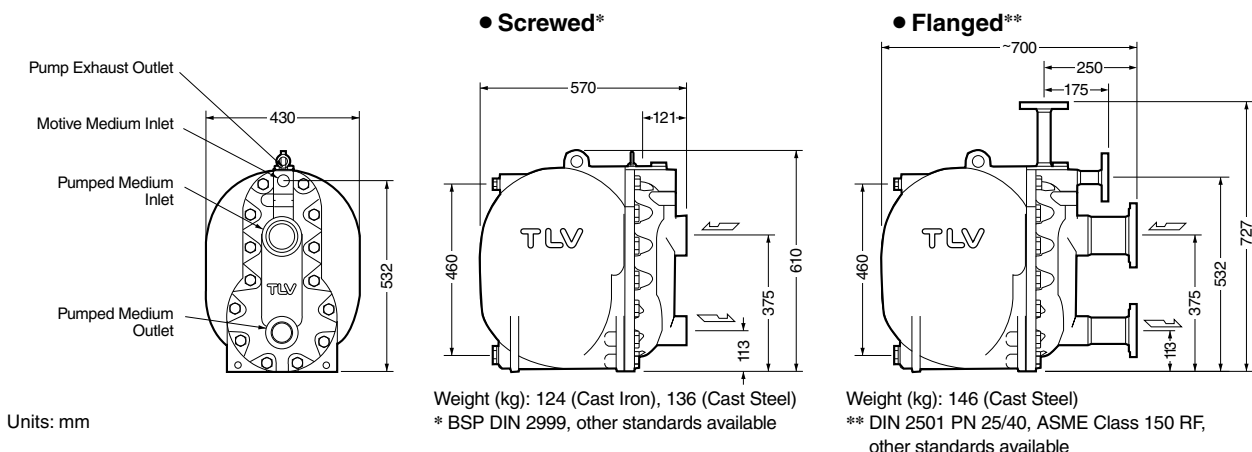

## Size of Receiver / Reservoir

The receiver/reservoir must have a capacity sufficient to store the condensate produced during the PowerTrap operation and discharge. A receiver will generally be larger than a reservoir because it must handle the condensate both as a liquid and as flash steam, and separate one from the other so that only condensate is sent to the PowerTrap.

### 1. Size of Receiver (flash steam is involved) (Length: 1 m)

Flash Steam up to (kg/h)	Receiver Diameter (mm)	Vent Pipe Diameter (mm)
25	80	25
50	100	50
75	125	50
100	150	80
150	200	80
200	200	100
300	250	125
400	300	125
500	350	150
700	400	200
800	450	200
1000	500	200
1100	500	250
1400	550	250
1500	600	250


### 2. Size of Reservoir (flash steam is not involved)

Amount of Condensate kg/h	Reservoir Diameter (mm) and Length (m)						
	40	50	80	100	150	200	250
300 or less	1.2 m	0.7					
400	1.5	1.0					
500	2.0	1.2	0.5				
600		1.5	0.6				
800		2.0	0.8	0.5			
1000			1.0	0.7			
1500			1.5	1.0			
2000			2.0	1.3	0.6		
3000				2.0	0.9	0.5	
4000					1.2	0.7	
5000					1.4	0.8	0.5
6000					1.7	1.0	0.6
7000					2.0	1.2	0.7
8000						1.3	0.8
9000						1.5	0.9
10000						1.7	1.0

### 3. If flash steam is condensed before it enters the receiver/reservoir, compare tables 1 & 2 and choose the larger of the two resultant sizes

Reservoir length can be reduced by 50% when the motive medium pressure (P<sub>m</sub>) divided by back pressure (P<sub>2</sub>) equals 2 or greater (when P<sub>m</sub> ÷ P<sub>2</sub> ≥ 2).

## Steam or Air Consumption (Motive Medium)

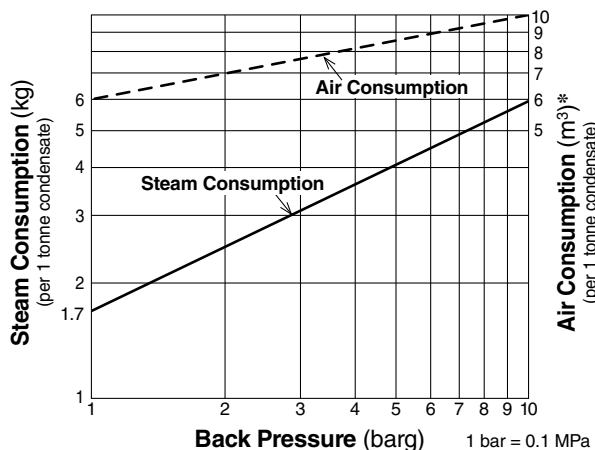


## Cycle Counter (option)

Two types of counter can be installed on the GP10 to monitor the number of pumping cycles and help to determine the timing of maintenance, or estimate the volume of pumped condensate.

• C1CM – (Counter Unit Type): Self-contained standalone unit. Includes an LCD counter display and an operation indicator LED.

• C1SM – (Terminal Box Type): Designed for use with remote monitoring equipment and systems.

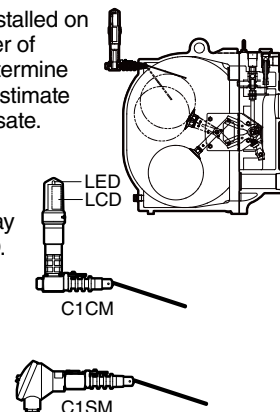


Intrinsically safe models are also available.

See the Cycle Counter SDS for further details.

## System Packages (Open Systems)

### Single System Package

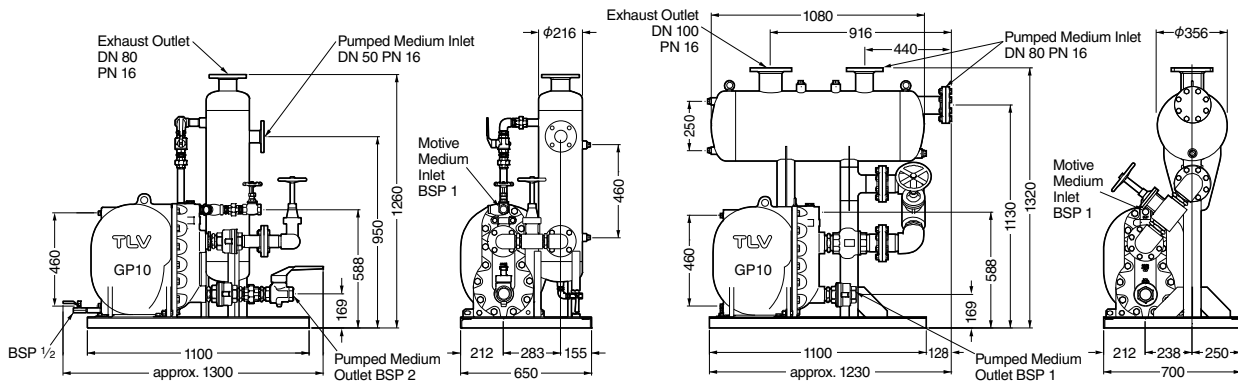

#### Type S1

Discharge Capacity: see discharge capacity graph **C**  
 (no correction factor required, maximum capacity 2 t/h)  
 Maximum Allowable Flash Steam: 200 kg/h  
 Tank Size: 30 l  
 Weight: 300 kg

#### Type M1

Discharge Capacity: see discharge capacity graph **A**  
 (no correction factor required)  
 Maximum Allowable Flash Steam: 500 kg/h  
 Tank Size: 100 l  
 Weight: 340 kg

### Twin System Package


With small condensate loads, PowerTrap 1 operates alone.  
 As condensate loads increase, PowerTraps 1 and 2 operate together.

#### Type L2

Discharge Capacity: double the discharge capacity found in graph **A** (no correction factor required)  
 Maximum Allowable Flash Steam: 1000 kg/h  
 Tank Size: 230 l  
 Weight: 570 kg

#### Type E2

Discharge Capacity: double the discharge capacity found in graph **A** (no correction factor required)  
 Maximum Allowable Flash Steam: 1500 kg/h  
 Tank Size: 330 l  
 Weight: 580 kg

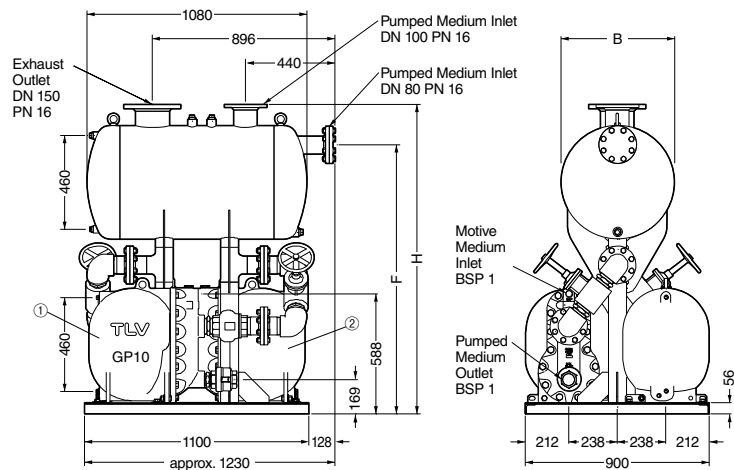

#### Standards:

Flanged Connections: DIN 2501  
 Screwed Connections: DIN 2999  
 Other standards available.  
 Actual specifications may differ from the ones shown. Please consult TLV for details.

Units: mm

#### Dimensions

Type	H	F	φ B
L2	1520	1320	560
E2	1620	1420	660

Manufacturer

**TLV** CO., LTD.

Kakogawa, Japan

is approved by LRQA Ltd. to ISO 9001/14001

ISO 9001  
 ISO 14001

