



BALANCED PRESSURE THERMOSTATIC STEAM TRAP

MODEL LV8/LV8-HC

BALANCED PRESSURE THERMOSTATIC STEAM TRAP WITH “FAIL-OPEN” DESIGN

Features

All stainless steel thermostatic trap suitable for applications where the condensate load is relatively small, e.g. tracing, vessels and heaters. Preferably for vertical installation.

1. “Fail open” feature.
2. Rugged yet light construction withstands superheat and water hammer.
3. Cyclic operation with fixed subcooling throughout entire pressure range.
4. Outstanding air venting capability.
5. Compact, yet high capacity.
6. Easy to maintain and easy to clean.
7. Hardened stainless steel valve surfaces.
8. Built-in screen with large surface area.




Specifications

Model	LV8	LV8-HC
Connection	Screwed	
Size (mm)	8, 10, 15, 20, 25	15, 20, 25
Max. Operating Press. (MPaG) PMO	0.8	
Min. Operating Press. (MPaG)	0.01	
Maximum Back Pressure	90% of Inlet Pressure	
Max. Operating Temp. (°C) TMO	see graph at right	
Subcooling of X-element Fill (°C)	up to 2 (option: up to 6)	up to 2
Type of X-element	C2C (option: C6)	C2HC

PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS):

Maximum Allowable Pressure (MPaG) PMA: 2.5

Maximum Allowable Temperature (°C) TMA: 425

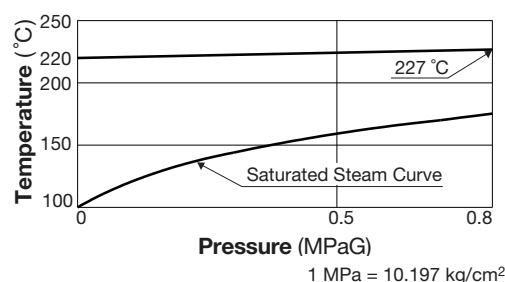


To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

No.	Description	Material	JIS	ASTM/AISI*
①	Body	Cast Stainless Steel	—	A351/A351M Gr.CF8
②	Cover	Cast Stainless Steel	—	A351/A351M Gr.CF8
③ ^R	X-element	Stainless Steel	—	—
④ ^R	Valve Seat	Stainless Steel	SUS316L	AISI316L
⑤ ^R	Screen	Stainless Steel	SUS304	AISI304
⑥	Nameplate	Stainless Steel	SUS304	AISI304


* Equivalent

Replacement kits available: (R) repair parts

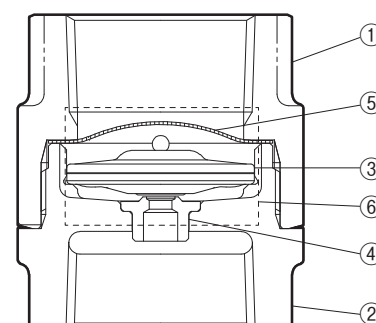

Dimensions

• LV8/LV8-HC Screwed

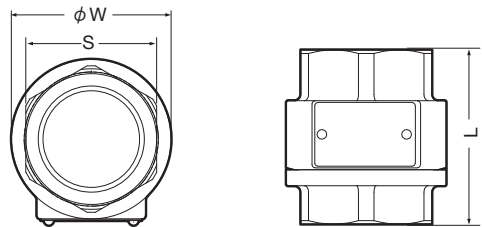


LV8/LV8-HC Screwed* (mm)

Size	L	φ W	S	Weight (kg)
8 **	55	50	27	0.4
10 **				
15				
20			41	0.6
25				0.5

* Rc(PT), other standards available
** LV8 only

Discharge Capacity

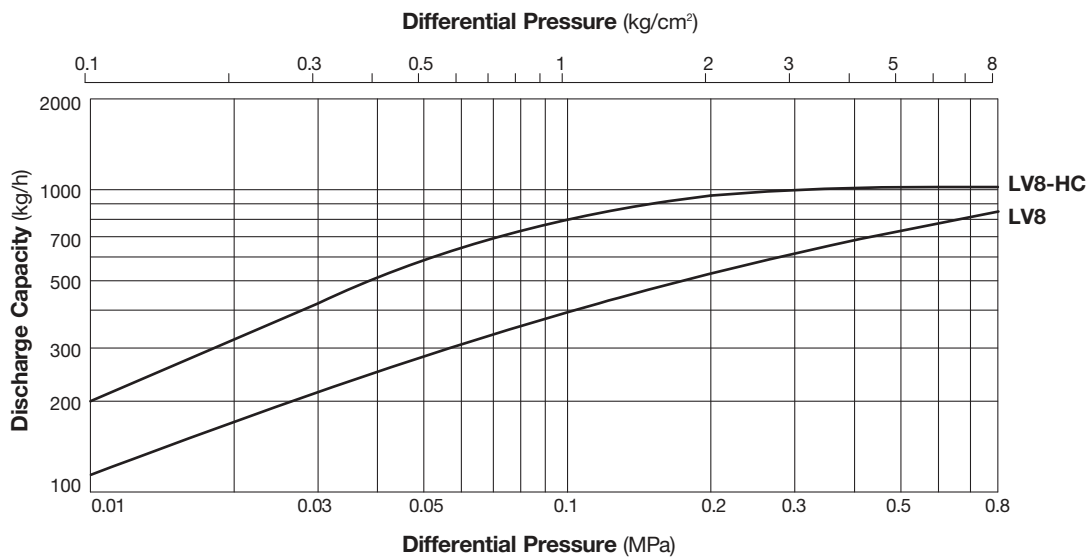

- 1. Differential pressure is the difference between the inlet and outlet pressure of the trap.
- 2. Recommended safety factor: at least 2.