



SteamAqua®

Steam-Fired Instantaneous Water Heater

MODEL SQ 2/4/6

COMPACT HIGH CAPACITY INSTANTANEOUS WATER HEATER WITH SIMPLE OPERATION

Features

The SteamAqua instantaneous water heater quickly produces a stable supply of 95 °C water for heating and sterilization in food product, chemical and pharmaceutical manufacturing as well as sanitary use in buildings, factories and hospitals.

1. Hot water at the desired temperature will be supplied in just 30 to 40 seconds¹⁾.
2. Thanks to the spiral tube heat exchanger the entire system can be packaged into a space-saving footprint of only 0.6 m².
3. All stainless steel hot water/steam supply piping available as option.
4. All-in-one package simplifies installation.
5. A built-in PowerTrap (steam trap/mechanical pump) enables easy condensate recovery and prevents water hammer.
6. Indirect heating with steam allows clean potable water to be heated and supplied as is, without contamination.
7. Simple and reliable operation with touch panel for temperature setting and system control.
8. Outside of pressure vessel regulations²⁾, so no paperwork or periodic inspections.
9. Operation start-up/shutdown time can be set with the schedule function (daily and weekly timers) to reduce excess power consumption.
10. Outdoor specifications also available.

1) May vary depending on actual operating conditions

2) Based on Japanese regulations, classification may differ depending on local regulations



Specifications

Model		SQ2	SQ4	SQ6
Thermal Capability Class		200 kW	400 kW	600 kW
Temperature Setting Range		30 to 95 °C		
Steam Control Valve Actuator Type		Pneumatic or Electric (with fail-safe feature) ¹⁾		
Required Utilities	Power	230 V AC (50 Hz) single phase		
	Steam ²⁾	0.6 MPaG or lower		
	Cold Water (inflow)	0.1 to 1.0 MPaG Temp.: 5 to 95 °C		
	Air for Steam Control Valve ³⁾	0.4 to 0.6 MPaG Oil-free Air filtered to 5 µm		
	Motive Steam for PowerTrap	0.15 to 0.6 MPaG Use supply steam		
Connection (mm)	Cold Water Inlet	25 ASME Class 150RF	50 ASME Class 150RF	
	Hot Water Outlet	25 ASME Class 150RF	50 ASME Class 150RF	
	Steam Inlet	25 ASME Class 150RF	40 ASME Class 150RF	50 ASME Class 150RF
	Condensate Outlet	25 ASME Class 150RF		
	Air ³⁾ Inlet	Rc(PT) 1/4		
Heating Method		Spiral Tube Heat Exchanger		
Applicable Hot Water Supply Piping		Single pass ⁴⁾ / Recirculating ⁵⁾		
Safety Features		<ul style="list-style-type: none"> • Steam Control Valve Fail-safe Feature Stops steam supply in case of unexpected power failure • Abnormal Temperature Rise Prevention Function Built-in internal cooling circulation unit detects minute changes in hot water flow or abnormalities in temperature and shuts off the steam supply Circulates cold water from a buffer to decrease temperature 		
Alarm Functions		High-Temp./Low-Temp. Warning, Alarm History Review		
Standard External Input/Output Functions		<ul style="list-style-type: none"> • External Input for Startup/Shutdown: Sets ON/OFF via external voltage-free contact input • External Input for Emergency Shutdown: Via external voltage-free contact • In Operation: Sends output during operation via voltage-free contact • External Input for Temperature Set Value: Changes set value via external analog signal (4 to 20 mA input/output) • Current Temperature Value Output: Outputs current temperature via analog signal (4 to 20 mA input/output) • Alarm Output: Sends output via voltage-free contact when there is an abnormality in temperature 		
Installation Location		Indoors (Outdoor specifications available as an option)		
Applicable Fluids		Heating: Steam, Heated: Water		

¹⁾ When an electric control valve is used for steam control, a recirculating system is recommended. For single pass method, consult TLV. 1 MPa = 10.197 kg/cm²

²⁾ When steam supply pressure to the unit is set by using a pressure reducing valve with a primary pressure exceeding 0.6 MPaG make sure to install a safety valve on the secondary side of the pressure reducing valve.

³⁾ Necessary when a pneumatic control valve is used for steam control.

⁴⁾ When single pass method is used, if used for baths, handwashing or anywhere people may come in contact with hot water, install a thermostat-equipped hot/cold water mixing device. Additionally, when used in applications that may fall below the minimum required flow rate, a hot water recirculation system is required. Contact TLV for more information.

⁵⁾ For closed circulation systems, make sure to install an expansion tank and safety relief valve on the hot water circulation line to protect the equipment.

PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS):

Maximum Allowable Pressure (MPaG) PMA: 1.0 (steam piping and water piping)

Maximum Allowable Temperature (°C) TMA: 185 (steam piping), 95 (feed water piping), 110 (hot water piping)




To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range.
Local regulations may restrict the use of this product to below the conditions quoted.

Copyright © TLV

Configuration

● SQ2/4/6

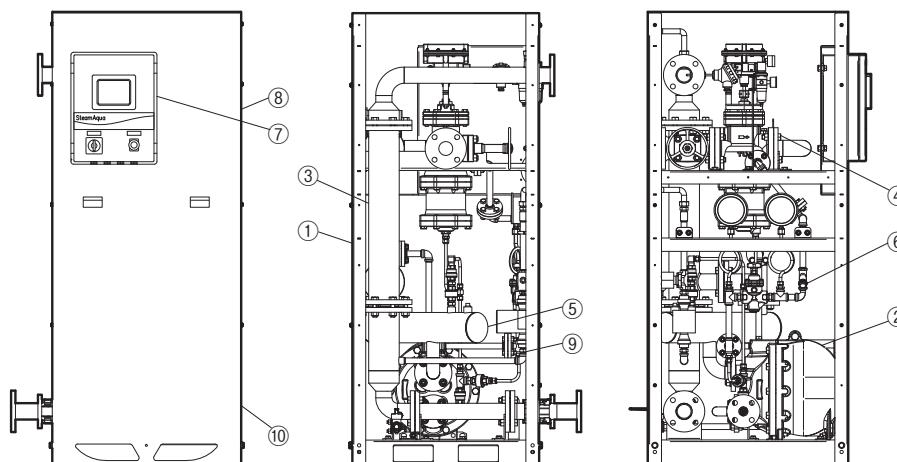

No.	Description	Material	JIS	ASTM/AISI*
①	Base & Frame Unit	Stainless Steel	SUS304	AISI304
②	Condensate Discharge Unit (PowerTrap)	Cast Iron**	FC250	A126 Cl.B
③	Heat Exchanger Unit	Stainless Steel	—	—
④	Steam Supply Unit	Cast Iron**	—	—
⑤	Header Unit	Stainless Steel	—	—
⑥	PowerTrap Steam Supply Unit	Stainless Steel	—	—
⑦	Control Panel	—	—	—
⑧	3-sided Cover (Front, Right, Left)	Stainless Steel	SUS304	AISI304
⑨	Internal Cooling Circulation Unit	Stainless Steel	—	—
⑩	Nameplate	Tetron (Polyester)	—	—



* Equivalent ** Stainless steel available as option

Dimensions


● SQ2/4/6 Flanged*

Model	Piping Connection Locations		Piping Connection Sizes				Approx. Weight (kg)
	H ₁	H ₂	Cold Water Inlet A	Hot Water Outlet B	Steam Inlet C	Condensate Outlet D	
SQ2	1223	1417	25	25	25	25	300 (310)
SQ4	1202	1459	50	50	40		320 (335)
SQ6	1192	1467			50		340 (355)

* ASME Class 150 RF
() When filled with water

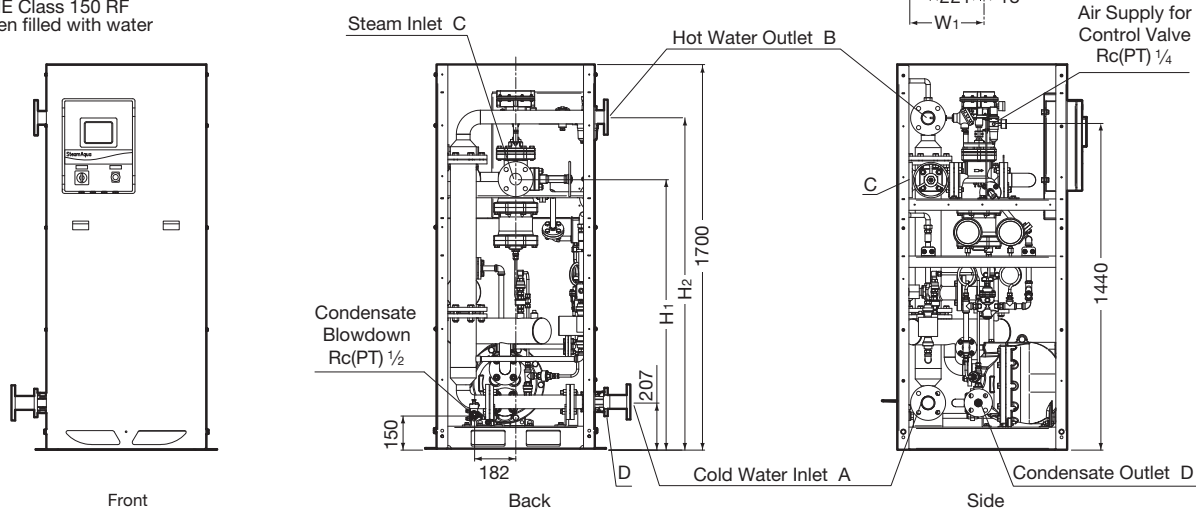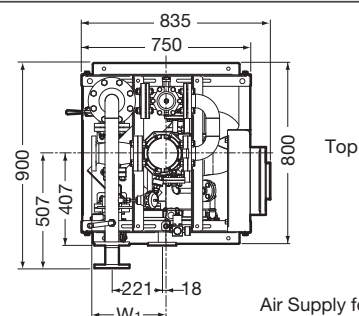

Thermal Capability

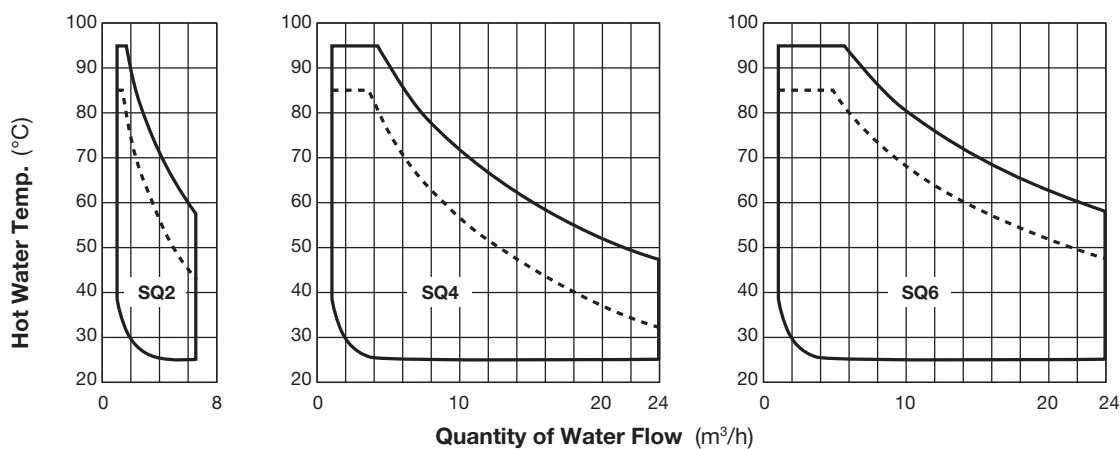

Cold Water Temp.: 20 °C

Supply Steam Pressure: ----- 0.3 MPaG

——— 0.6 MPaG

NOTE: The thermal capability charts shown here are for reference only.
Thermal capability will vary with steam pressure and feed water temperature.
Consult TLV about actual selection as well as thermal capability.

Options

Back Cover ¹⁾	With back cover equipped (Standard model is equipped with only front, left and right sided cover)
Hot water and steam supply piping materials	Wetted portions of hot water and steam supply piping are of all stainless steel construction.
Outdoor Specifications	All four sides and top are covered. Material: SUS304 (including base and frame unit)
	Control panel: protection class rated at IP44
	Equipped with internal electrical equipment (such as cables) for outdoor use
Condensate Preheater ²⁾³⁾	Small heat exchanger installed on the inlet side of the main heat exchanger utilizes heat from condensate to preheat water ⁴⁾ Heating method: Spiral tube heat exchanger

¹⁾ Back cover material: SUS304

²⁾ Only for SQ4/SQ6

³⁾ Cold water supply is limited to 10 m³/h or less.

⁴⁾ May vary depending on actual operating conditions

Memo: