



FREE FLOAT® AIR TRAP

MODEL JAH7.2R

HIGH-CAPACITY COMPRESSED AIR TRAP FOR HIGH PRESSURE AIR SERVICE

Benefits

Extremely durable, inline-repairable free float trap with a large capacity for automatic drainage of condensate and oil from compressed-air systems. Recommended installations include high pressure large receiver tanks and after coolers.

1. Self-modulating free float provides continuous, smooth, low velocity condensate discharge as process loads vary, for maximum performance.
2. Unique rotational seating design prevents concentrated wear to provide long maintenance-free service life.
3. Rugged float construction with up to 1600 psig hydraulic shock rating ensures excellent performance of the trap.
4. Easy, inline access to internal parts simplifies cleaning and lowers maintenance costs.
5. Built-in screen with large surface area ensures extended trouble-free service.
6. The valve seat is made of PTFE and other major internal parts are made of stainless steel.




Specifications

Model	JAH7.2R	
Connection	Socket Weld	Flanged
Size (in)	1 ½, 2	1 ½, 2
Orifice No.	2, 5, 10, 20, 30, 40	
Maximum Operating Pressure (psig) PMO	30, 75, 150, 285, 425, 600	
Maximum Differential Pressure (psi) ΔPMX	30, 75, 150, 285, 425, 600	
Minimum Operating Pressure (psig)	Vacuum	
Maximum Operating Temperature (°F) TMO	302	
Maximum Allowable Pressure (psig) PMA	600	
Maximum Allowable Temperature (°F) TMA	800	
Minimum Condensate Load for Tight Sealing (lb/h)	22	
Applicable Fluid*	Air	

*Do not use for toxic, flammable or otherwise hazardous fluids.


JAH7.2R is a non-standard product, consult TLV for delivery time required.



To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

No.	Description	Material	ASTM/AISI*	JIS
①	Body	Cast Steel	A216 Gr.WCB	—
②	Cover	Carbon Steel	A105	—
③ ^F	Float	Stainless Steel	AISI316L	SUS316L
④ ^R	Valve Seat Holder	Stainless Steel	AISI420F	SUS420F
⑤ ^{MR}	Valve Seat Holder Gasket	Soft Iron	AISI1010	SUYP
⑥ ^R	Valve Seat (Orifice)	Fluorine Resin	PTFE	PTFE
⑦ ^R	Snap Ring	Stainless Steel	AISI304	SUS304
⑧ ^{MR}	Valve Seat O-Ring	Fluorine Rubber	D2000HK	FPM
⑨	Valve Seat Holder Plug	Cast Stainless Steel	A351 Gr.CF8	—
⑩ ^{MR}	Holder Plug Gasket	Soft Iron	AISI1010	SUYP
⑪ ^R	Screen	Stainless Steel	AISI430	SUS430
⑫	Screen Holder	Stainless Steel	AISI304	SUS304
⑬ ^{MR}	Cover Gasket	Graphite/Stainless Steel	-/AISI304	-/SUS304
⑭	Cover Bolt	Alloy Steel	A193 Gr.B16	SNB16
⑮	Cover Nut	Carbon Steel	AISI1045	S45C
⑯	Nameplate	Stainless Steel	AISI304	SUS304
⑰	Socket**/Flange	Carbon Steel	A105	—
⑱ ^{MR}	Drain Plug Gasket	Soft Iron	AISI1010	SUYP
⑲	Drain Plug	Carbon Steel	AISI1025	S25C


* Equivalent ** Shown on reverse
Replacement kits available: (M) maintenance parts, (R) repair parts, (F) float

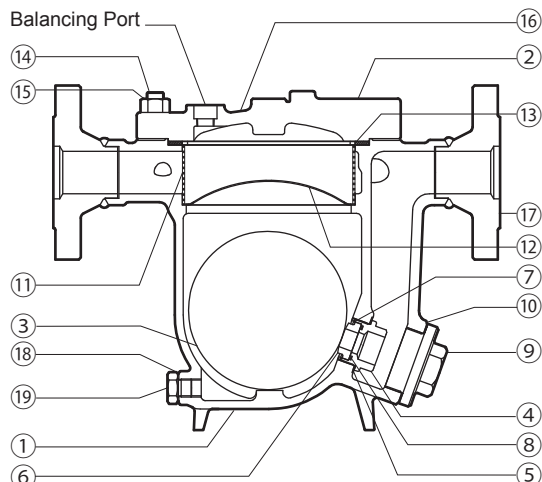



Dimensions


● JAH7.2R Socket Weld

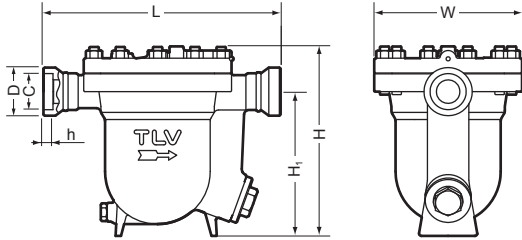

JAH7.2R Socket Weld (in)

Size	L	H	H ₁	φ W	φ D	φ C	h	Weight (lb)
1 1/2	15 3/4	12 5/8	9 5/8	9 13/16	2 1/2	1.915	1/2	77
2					3 1/16	2.406	5/8	84

● JAH7.2R Flanged

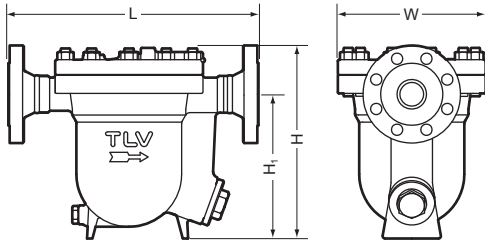

JAH7.2R Flanged (in)


Size	L			H	H ₁	φ W	Weight* (lb)
	Connects to ASME Class						
	150RF	300RF	600RF				
1 1/2	16	16 1/4	16 7/8	12 5/8	9 5/8	9 13/16	81
2	16 1/8	16 3/8	17 1/8				86

Other standards available, but length and weight may vary

*Weight is for Class 600 RF.

NOTE:


A pressure-balancing line must be connected to the air system from the balancing port at the top of the trap to a place above any possible condensate accumulation in the system.




Balancing Port (Socket Weld) (in)

Inlet/Outlet Connection	Size	φ C	h
Socket Weld	1/2	0.855	1/2
Flanged			


Discharge Capacity

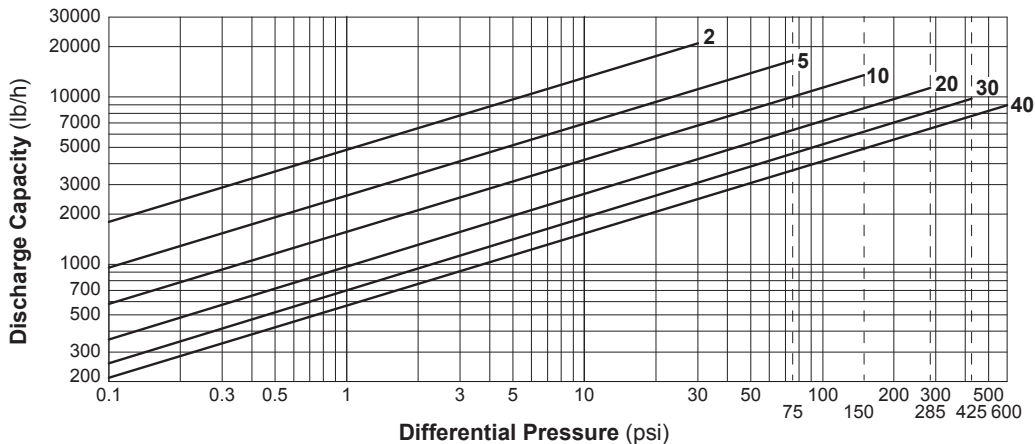

- Line numbers within the graph refer to orifice numbers.
- Differential pressure is the difference between the inlet and outlet pressure of the trap.
- The chart is applicable to condensate below 212°F.
- The discharge capacity is for a liquid with specific gravity of 1.
- Recommended safety factor: at least 1.5.



DO NOT use this product under conditions that exceed maximum differential pressure, as condensate backup will occur!



DO NOT DISASSEMBLE OR REMOVE THIS PRODUCT WHILE IT IS UNDER PRESSURE. Allow internal pressure of this product to equal atmospheric pressure and its surface to cool to room temperature before disassembling or removing. Failure to do so could cause burns or other injury. READ INSTRUCTION MANUAL CAREFULLY.

TLV CORPORATION

13901 South Lakes Drive, Charlotte, NC 28273-6790
 Tel: 704-597-9070 Fax: 704-583-1610
 E-mail: tlv@tlvengineering.com <https://www.tlv.com>
 For Technical Service 1-800 "TLV TRAP"



Manufacturer
TLV CO., LTD.
 Kakogawa, Japan
 is approved by LRQA Ltd. to ISO 9001/14001

