



# FREE FLOAT GAS TRAP<sup>®</sup>

## MODEL GAS3N

STEEL GAS TRAP WITH TIGHT SHUT-OFF FOR INERT AND HAZARDOUS GASES

### Benefits

**High pressure, inline repairable free float trap with tight shut-off. Automatically drains condensate from air and gas systems.**

1. Constant water seal and unique rotational seating design eliminate concentrated wear to ensure long life.
2. Three-point seating provides a tight seal even under no-load conditions (with rubber orifice).
3. Easy, inline access to internal parts simplifies cleaning and lowers maintenance costs.



### Specifications

Model	GAS3N (Metal Orifice)		GAS3N (Rubber Orifice)	
Connection	Flanged		Flanged	
Size (in)	1½, 2		1½, 2	
Orifice No.	5, 10, 21, 45		10, 21, 45	
Maximum Operating Pressure (psig)	PMO**	75, 150, 300, 640	PMO**	150, 300, 640
Maximum Differential Pressure (psi)	Δ PMX**	75, 150, 300, 640	Δ PMX**	150, 300, 640
Minimum Operating Pressure (psig)	Vacuum		Vacuum	
Maximum Operating Temperature (°F)	TMO	572 (S)*, 662 (C)*	TMO	302
Maximum Allowable Pressure (psig)	PMA	640	PMA	640
Maximum Allowable Temperature (°F)	TMA	572 (S)*, 662 (C)*	TMA	572 (S)*, 662 (C)*

\* (S) = Stainless steel version (C) = Cast steel version \*\* For specific gravities other than 1.00, use table below

GAS3N is a non-standard product, consult TLV for delivery time required.

Orifice No.	Specific Gravity						
	1.00-0.85	0.84-0.80	0.79-0.75	0.74-0.70	0.69-0.65	0.64-0.60	0.59-0.55
	Max. Operating Pressure PMO (psig) & Max. Differential Pressure Δ PMX (psi)						
10	150	143	118	92	66	41	15
21	300	295	242	189	137	84	31
45	640	640	527	412	297	182	67
5	75	71	58	46	33	20	7
10	150	143	118	92	66	41	15
21	300	295	242	189	137	84	31
45	640	640	527	412	297	182	67


### CAUTION

To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

Consult TLV for use with toxic, flammable or otherwise hazardous gases.

No.	Description	Material	ASTM/AISI <sup>†</sup>	JIS
①	Body	Cast Steel	A216 Gr.WCB	—
②	Cover	Carbon Steel	AISI1025	S25C
③	Orifice (Metal)	—	—	—
③	Orifice (Rubber)	Fluorine Rubber/Stainl. Stl.	D2000HK/AISI304	FPM/SUS304
④	Float	Stainless Steel	AISI316L	SUS316L
⑤	Orifice Gasket	Soft Iron	AISI1010	SUYP
⑥	Cover Gasket	Graphite/Stainless Steel	—/AISI304	—/SUS304
⑦	Cover Bolt	Alloy Steel	A193 Gr.B16	SNB16
⑧	Cover Nut	Carbon Steel	AISI1045	S45C
⑨	Plug	Stainless Steel	AISI303	SUS303
⑩	Plug Gasket	Soft Iron	AISI1010	SUYP
⑪	Nameplate	Stainless Steel	AISI304	SUS304
⑫	Drain Plug**	Carbon/Cast Steel	AISI1025	S25C
⑬	Drain Plug Gasket**	Soft Iron	AISI1010	SUYP
⑭	Flange	Carbon Steel***	A105	—
⑮	Guide Pin	Stainless Steel	AISI304	SUS304
⑯	Bushing	Stainless Steel	AISI303	SUS303
⑰	Eye Bolt	Carbon Steel	A6	SS400

<sup>†</sup> Equivalent <sup>\*\*</sup> Shown on reverse <sup>\*\*\*</sup> Material depends on flange specifications

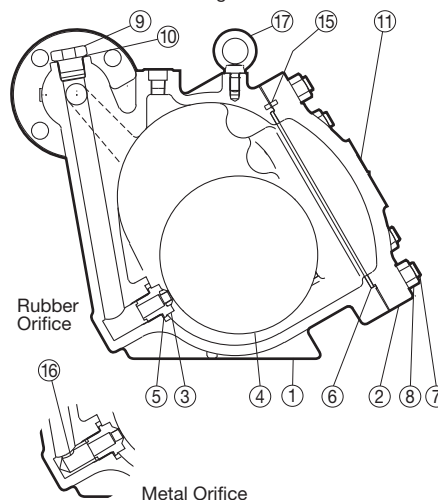

Copyright © TLV

**Options**

1. Body material stainless steel.
2. Flanged or screwed balancing port connection.
3. Orifice material EPDM (ethylene propylene rubber), TMO 212 °F.

**Leakage Rating**


Maximum Seat Leakage

Model	Orifice	Minimum Δ P (psi)
		0.1
GAS3N	Rubber	<0.15 standard ml/min, <1 bubble/min
	Metal	<0.1% of rated valve capacity

\* Standard milliliters based on 60 °F, 14.73 psi abs

**Dimensions**

● **GAS3N Flanged**

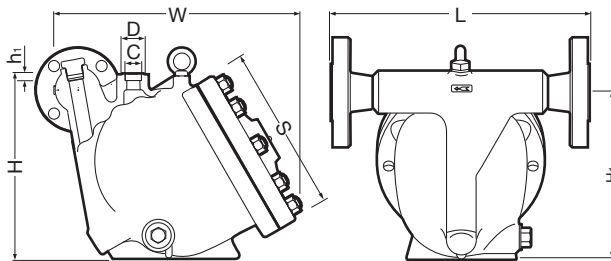

**NOTE:**  
A pressure-balancing line must be connected to the gas or air system from the balancing port at the top of the trap to a place above any possible condensate accumulation in the system.

**GAS3N Flanged (in)**


Size	L Connects to ASME Class				H	H <sub>1</sub>	W	φ S	Weight* (lb)
	150RF	300RF	600RF	900RF					
1½	18½	18½	18½	18½	13¾	12¾	17½	12	174
2	19⅝	19⅝	19⅝	19⅝					187

Other standards available, but length and weight may vary  
\* Weight is for Class 600 RF

**Balancing Port Dimensions (in)**

Pipe Size	φ D	φ C	h <sub>1</sub>
½	1⅝	⅞	½
¾	1⅞	1⅛	
1	1⅞	1⅝	

**Discharge Capacity**

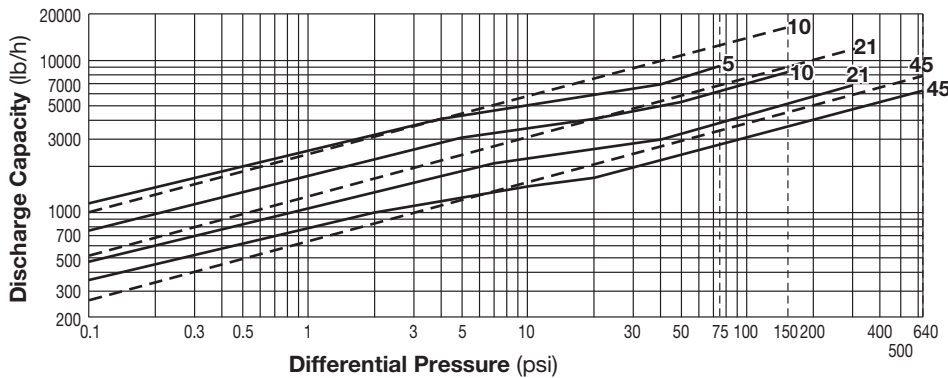

- 1. Line numbers within the graph refer to orifice numbers.
- 2. Differential pressure is the difference between the inlet and outlet pressure of the trap.
- 3. The chart is applicable to condensate below 212 °F (Rubber Orifice) or 11°F below saturated steam temperature (Metal Orifice).
- 4. The discharge capacity is for a liquid with specific gravity of 1.
- 5. Recommended safety factor: at least 1.5.

Capacity Conversion Factors

Specific Gravity (S.G.)	0.95	0.9	0.85	0.8	0.75	0.7	0.65	0.6	0.55
Conversion Factor	1.03	1.06	1.08	1.12	1.16	1.19	1.24	1.29	1.35

Before using the capacity chart multiply the required capacity (including safety factor) by the appropriate conversion factor for the specific gravity of the liquid. Choose from the table above or use the following formula: Conversion factor =  $\frac{1}{\sqrt{S.G.}}$



**CAUTION**  
DO NOT use traps under conditions that exceed maximum differential pressure, as condensate backup will occur!



**DO NOT DISASSEMBLE OR REMOVE THIS PRODUCT WHILE IT IS UNDER PRESSURE.**  
Allow internal pressure of this product to equal atmospheric pressure and its surface to cool to room temperature before disassembling or removing. Failure to do so could cause burns or other injury. READ INSTRUCTION MANUAL CAREFULLY

**TLV CORPORATION**

13901 South Lakes Drive, Charlotte, NC 28273-6790  
Tel: 704-597-9070 Fax: 704-583-1610  
E-mail: [tlv@tlvengineering.com](mailto:tlv@tlvengineering.com) <https://www.tlv.com>  
For Technical Service 1-800 "TLV TRAP"



Manufacturer  
**TLV CO., LTD.**  
Kakogawa, Japan  
is approved by LRQA Ltd. to ISO 9001/14001

